

iPlayer 3, ColorPlay 3, 100-240V

Date: _____
Type: _____
Firm Name: _____
Project: _____

North America Power Cord

CONTROLLER

Author, configure, and control dynamic LED light shows for DMX lighting networks

iPlayer 3 controller is a compact yet powerful show storage and playback device capable of delivering light shows to installations with up to 340 unique light addresses. Packaged with ColorPlay 3 light show authoring software, iPlayer 3 is designed to add new levels of sophistication and flexibility to your lighting installations while eliminating the need for expensive lighting boards and technical programming expertise.



- Easy to use—With factory preset shows, custom show-authoring capabilities, an intuitive LCD interface, removable SD card storage, and onboard light addressing features, iPlayer 3 enables you to spend more time on the creative aspects of lighting design and less time on setup.
- Packaged with ColorPlay 3 light show authoring software—ColorPlay 3 gives you the flexibility to create and manage light shows using fully customizable effects, multi-track editing, timeline layering, and transition styles.
- Designed for use with the optional Controller Keypad—Controller Keypad is a wall-mounted user interface providing instant pushbutton playback of up to eight light shows.
- Supports the optional AuxBox expansion device—AuxBox automatically triggers up to eight iPlayer 3 light shows using any remote triggering device with a dry-contact closure. Via the AuxBox, you can trigger light shows by motion sensors, third party control or sensor systems, and more.
- Control two DMX universes—iPlayer 3 has two DMX output ports, each controlling a universe of 512 DMX channels.
- Automate show playback—Set alarms to automatically trigger show playback based on a specific date, day of the week, weekdays, weekends, or an astronomical event, such as sunrise or sunset.

For more information, please refer to
www.colorkinetics.com/ls/controllers/iplayer3/

Specifications

Due to continuous improvements and innovations, specifications may change without notice.

Electrical

Input Voltage 100 to 240 VAC, 50/60 Hz, 5 W

Control

Capability 2 universes of 512 DMX addresses each

Computer Interface USB 2.0

External/Auxiliary Interface Two DMX512 RJ45 ports.
Two RS-232 9-pin serial ports.

Data Storage Removable industrial grade secure digital card

Physical

Dimensions 209 x 137 x 33 mm (8.2 x 5.4 x 1.3 in)
(Height x Width x Depth)

Weight 0.5 kg (1.2 lb)

Housing Polycarbonate

Operating Temperature -10 to 40 °C (14 to 104 °F)

Humidity 0 to 95%, non-condensing




Certification and Safety

Certification UL/cUL, FCC Class B, CE, C-Tick

Environment Dry Location, IP20



Dimensions

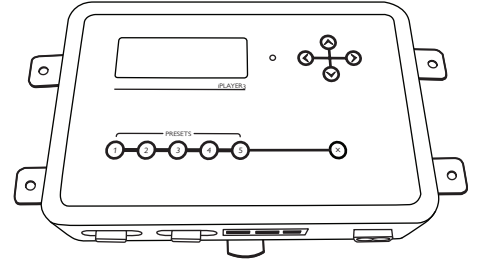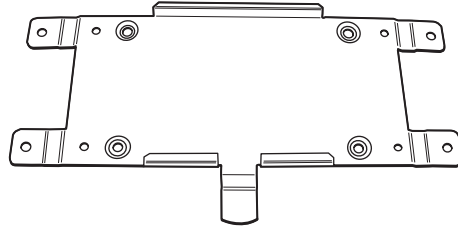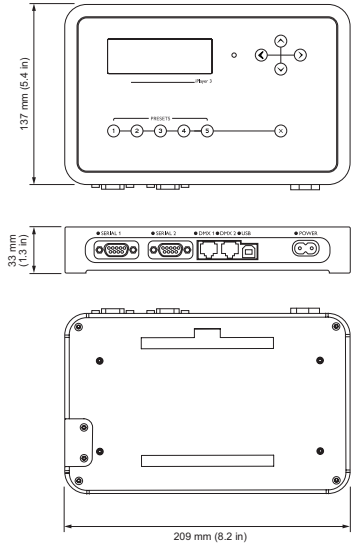

Part Numbers

Use Item Number when ordering in North America.

Controller

	Item Number	Item 12NC
iPlayer 3, ColorPlay 3, 100-240V North America Power Cord	103-000019-00	910403327101

Accessories

Controller Keypad, DB-9 Serial	103-000020-00	910503700223
AuxBox, DB-9 Serial	103-000021-01	910503702433
Replacement 512 MB Industrial SD Card	120-000199-00	912400135915



© 2023 Signify Holding. All rights reserved. Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed.

Color Kinetics
www.colorkinetics.com